

KAPPA-600 Left HCA



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 6 ohm
- * Recommended Amp Power: 35-200W
- * Frequency Response: 30 Hz - 27 kHz -
- * Sensitivity: 90 dB / 2,83V / 1 m
- * Crossover frequency: 100 Hz & 3 kHz

SYSTEM COMPONENTS:

- * Cabinet: CKAPPA-600 Left HCA (Not for sale)
- * Grille: GKAPPA-600 HCA (2400770)
- * Grille: GKAPPA-600 HCA (2400800) Left
- * Grille: GKAPPA-600 HCA (2400810) Right
- * Woofer: G1306A-L 170mm Woofer (26mm voice coil)
- DC Resistance: 4,3 ohm
- * Woofer: G1310A 250mm Woofer (51mm voice coil)
- DC Resistance: 7,4 ohm

SYSTEM COMPONENTS: (cont'd)

- * Tweeter: A1301A 25mm Ceramic Dome Tweeter
- DC Resistance: 3,6 ohm
- * Crossover Network: NKAPPA-600 HCA (2700800)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 37,40x8,66x16,73 In. D (950x220x425mm D)
- * Shipping Weight: 72,75 lbs. (33 kg.)


WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product

PACKAGE

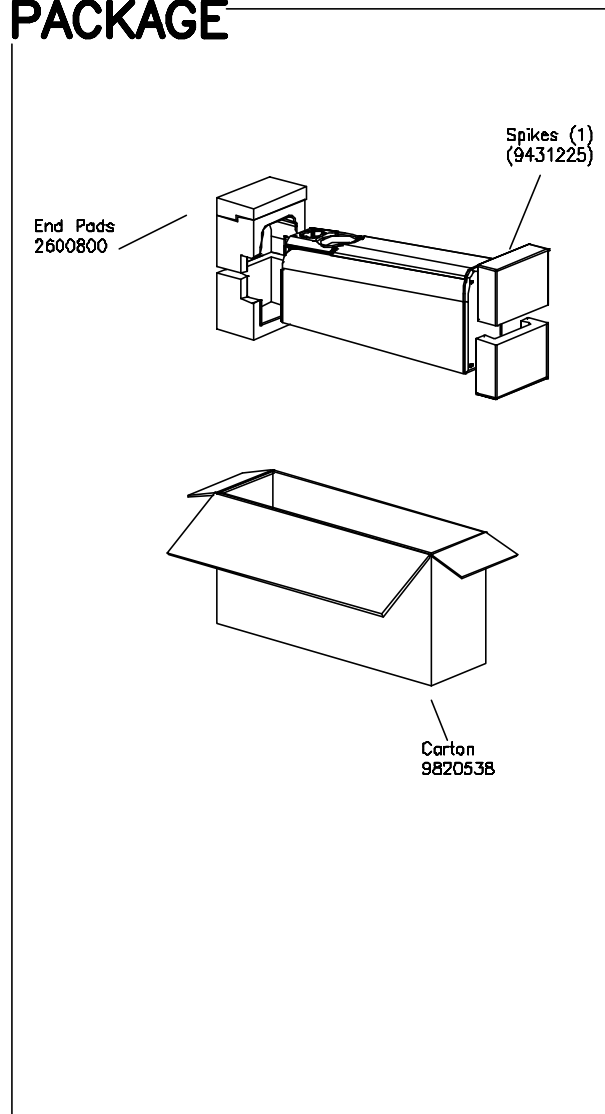


SCHEMATIC

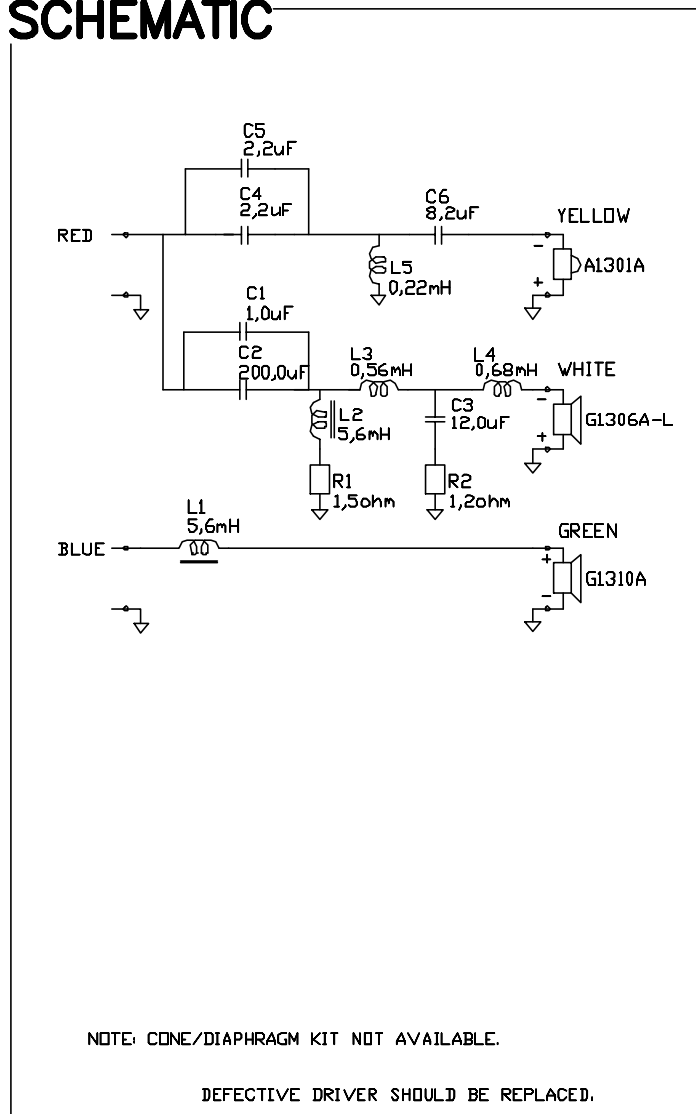

KAPPA-600 Left HCA

KAPPA-600 Left HCA

COMPONENT EXPLODED VIEW

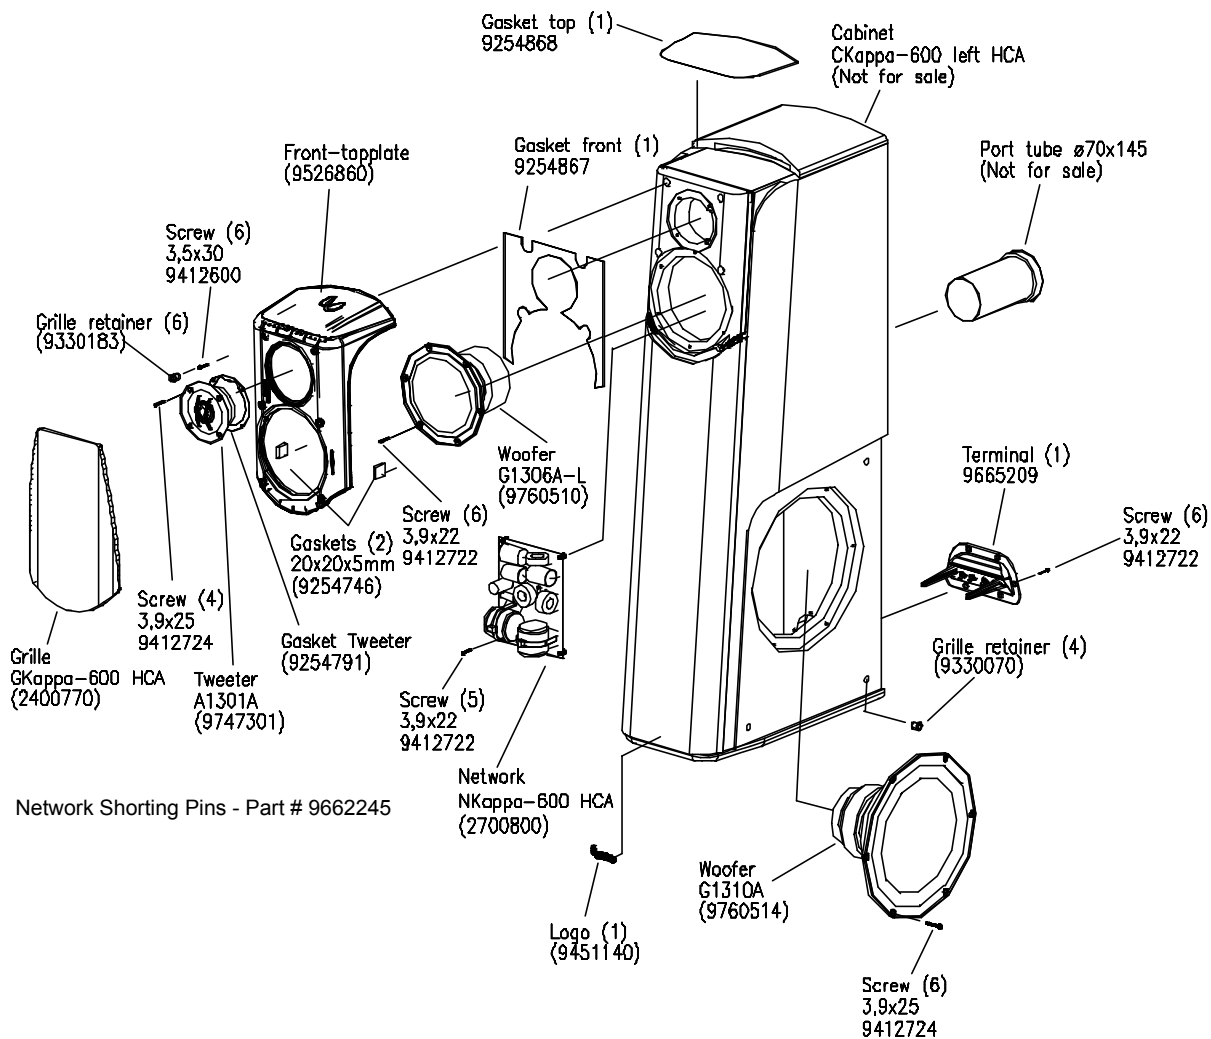

Spike (4) (9431225)
Cone nut (4)